




8311 Max. 2,5 W

AC/DC ADAPTERS - UNREGULATED

- Plug-in unit
- Fixed output voltages
- Thermal fuse in transformer
- Available as standard version with bridge rectifier and capacitor
- Exchangeable output plugs




| Technical specifications | |
|----------------------------------|--------------------------|
| Input voltage: | 230 VAC +6/-10%, 50/60Hz |
| Output voltage: | 2-48 VAC |
| Max. output power: | 2,5 W |
| Insulation class: | II |
| Electrical safety standard: | EN 60065, EN 60950 |
| EMC standards | |
| • Emission: | EN 50081-1 |
| • Immunity: | EN 50082-1 |
| Output terminals | |
| • Cord with/without plug: | Tilbehør / Accessories |
| Dimensions without plug (LxWxH): | 75 x 47 x 49 mm |
| Weight: | 220 g |

Steckernetzgeräte AC/AC

Steckernetzgeräte AC/DC

Wechselrichter DC/AC

Notstromversorgung DC-UPS

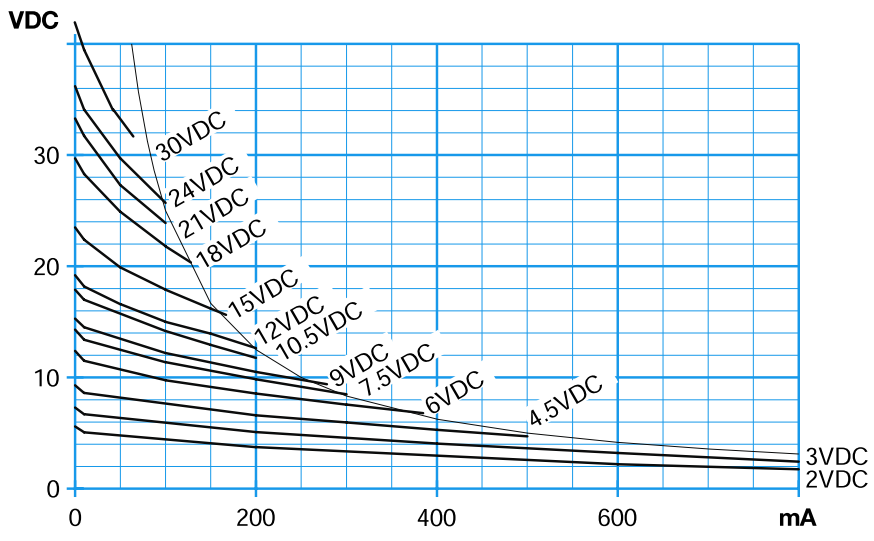

| Voltage version (VDC) | Max. power (W) |
|-----------------------|----------------|
| 2 | 1,2 |
| 3 | 1,5 |
| 4,5 | 2,0 |
| 6 | 2,5 |
| 7,5 | 2,5 |
| 9 | 2,5 |
| 10,5 | 2,5 |
| 12 | 2,5 |
| 15 | 2,5 |
| 18 | 2,5 |
| 21 | 2,5 |
| 24 | 2,5 |
| 30 | 2,5 |
| 48 * | 2,5 |

* Not in diagram

48 V version: No load : 59V
40mA : 48V