



8421

Max. 36 W

AC/DC POWER SUPPLIES - LINEAR - REGULATED



- Stepless adjustable output voltage
- Secondary switch
- Short circuit proof and overvoltage protection
- Thermal fuse in transformer and glass fuse on printed circuit board
- Mains cord
- Snap terminals or cable
- Mounting brackets available

Batterieladegeräte

LADix System

DC/DC Wandler

Netzgeräte
AC/AC

**Netzgeräte
AC/DC**

Steckernetzgeräte
AC/AC

Steckernetzgeräte
AC/DC

Wechselrichter
DC/AC


Notstromversorgung
DC-UPS

Technical specifications - 5-15 V version


Input voltage:	230 VAC +6/-10%, 50/60Hz
Output voltage:	5-15 VDC
Max. output power:	36 W
Max. load current:	6 V / 4 A - 12 V / 3 A
Load regulation:	1,5%
Line regulation:	0,05%
Switch frequency:	Ca. 30 kHz
Temperature range:	-10°C - +40°C
Ripple:	< 3 mV RMS
Efficiency:	Ca. 60%
Current limiting:	4,5 A
Insulation class:	II
Insulation voltage:	4000 V
Electrical safety standard:	EN 60065
EMC standards	
• Emission:	EN 50081-1
• Immunity:	EN 50082-1
Dimensions (LxWxH):	190 x 100 x 55 mm
Weight:	1,3 kg

* Some technical specifications may differ for other voltage versions.

5-15 VDC version

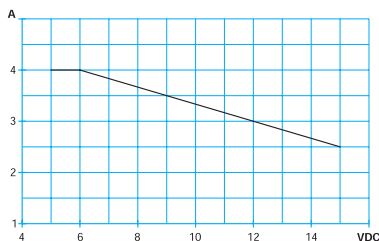

12-30 VDC version

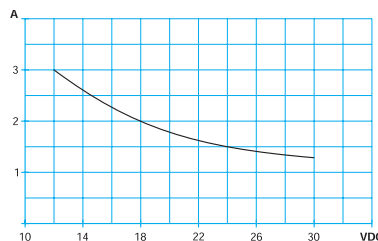

Voltage version (VDC)	Max. load (A)
5-15	6 V / 4 A - 12 V / 3 A
12-30	12 V / 3 A - 24 V / 1,5 A