




9619-9819

Max. 40,8 W

AC/DC SWITCH MODE PLUG-IN

9819 - medical approved (EN 60601)
12V / 24V version

- Fixed output voltages
- Specially designed for IT-equipment
- Exchangeable output plugs

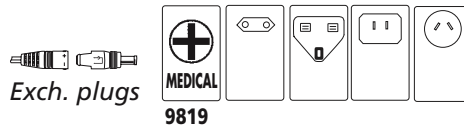

9819

Batterieladegeräte

LADix System

DC/DC Wandler

Netzgeräte
AC/AC

Netzgeräte
AC/DC

Steckernetzgeräte
AC/AC

Steckernetzgeräte
AC/DC

Wechselrichter
DC/AC

Notstromversorgung
DC-UPS

Technical specifications - 13,2 V version 9619

Input voltage:	190-264 V AC / 240-360 VDC
Output voltage:	13,2 ±0,1 VDC
• Internally adjustable:	10,0 - 15,0 V
Max. output power:	36 W
Max. load current:	2,4 A
Load regulation:	< 20 mV
Line regulation:	< 20 mV
Switch frequency:	40 kHz
Temperature range:	-10°C - +40°C
Ripple:	< 30 mV p-p 40 kHz/100 Hz
Current limiting:	Min. 2,6 A, max. 3,1 A
Overvoltage protection:	Zener
Insulation class:	II
Electrical safety standard:	EN 60065, EN 60950
EMC standards	
• Emission:	EN 50081-1
• Immunity:	EN 50082-1
Output terminals	
• Cord with/without plug:	Tilbehør / Accessories
Dimensions without plug (LxWxH):	100 x 63 x 47 mm
Weight:	250 g

Some technical specifications may differ for other models and voltage versions.

Voltage versions 9619

Input (VAC)	Output (VDC)		Max. current (A)	Max. output power (W)
	Nom.	Internally adjustable		
230	7,5	4,5 - 7,8	3,0	23,4
230	9	7,5 - 12,0	2,8	33,6
115* / 230	13,2	10,0 - 15,0	2,4	36
230	18,2	15,0 - 24,0	1,7	40,8
230	24,4	24,0 - 30,0	1,3	39

* UL approved (UL 1950)