




# 9619-9819

Max. 40,8 W

## AC/DC SWITCH MODE PLUG-IN

9819 - medical approved (EN 60601)  
12V / 24V version

- Fixed output voltages
- Specially designed for IT-equipment
- Exchangeable output plugs

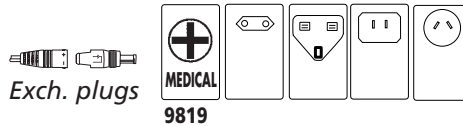

9819

### Technical specifications - 13,2 V version 9619

Input voltage:	190-264 V AC / 240-360 VDC
Output voltage:	13,2 0,1 VDC
• Internally adjustable:	10,0 - 15,0 V
Max. output power:	36 W
Max. load current:	2,4 A
Load regulation:	< 20 mV
Line regulation:	< 20 mV
Switch frequency:	40 kHz
Temperature range:	-10°C - +40°C
Ripple:	< 30 mV p-p 40 kHz/100 Hz
Current limiting:	Min. 2,6 A, max. 3,1 A
Overvoltage protection:	Zener
Insulation class:	II
Electrical safety standard:	EN 60065, EN 60950
EMC standards	
• Emission:	EN 50081-1
• Immunity:	EN 50082-1
Output terminals	
• Cord with/without plug:	Tilbehør / Accessories
Dimensions without plug (LxWxH):	100 x 63 x 47 mm
Weight:	250 g

Some technical specifications may differ for other models and voltage versions.

### Voltage versions 9619

Input (VAC)	Output (VDC)		Max. current (A)	Max. output power (W)
	Nom.	Internally adjustable		
230	7,5	4,5 - 7,8	3,0	23,4
230	9	7,5 - 12,0	2,8	33,6
115* / 230	13,2	10,0 - 15,0	2,4	36
230	18,2	15,0 - 24,0	1,7	40,8
230	24,4	24,0 - 30,0	1,3	39

\* UL approved (UL 1950)

Batterieladegeräte

LADix System

DC/DC Wandler

Netzgeräte  
AC/AC

Netzgeräte  
AC/DC

Steckernetzgeräte  
AC/AC

Steckernetzgeräte  
AC/DC

Wechselrichter  
DC/AC

Notstromversorgung  
DC-UPS